

RoHS Compliant

Specifications:

Material And Finish:


Insulator:PBT UL94V-0
Plated:See Ordering Information

Rating:

Current Rating:10.0Amp(16AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:


Contact resistance:10m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute

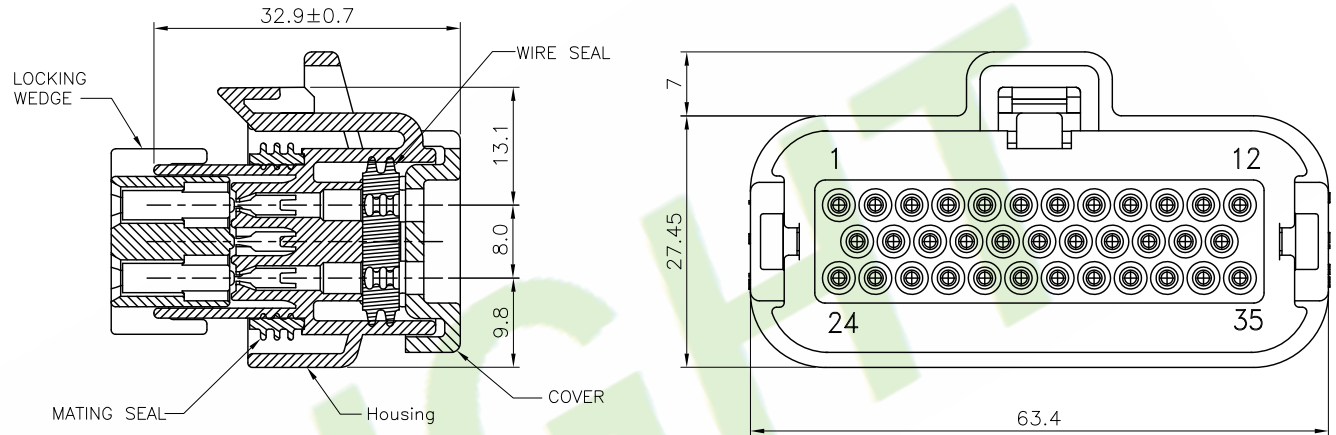

Ordering Information

H400005-35-XX-X

- 1: Series No.
- 2: No. of Positions
- 3: See Table
- 4: A:In bag
B:In Tube
C:In Tray

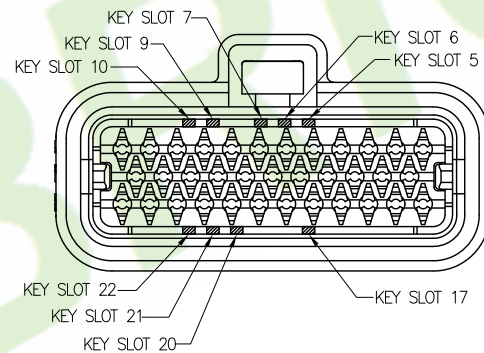

H400005-35-05-X	7 & 22
H400005-35-04-X	5 10 22
H400005-35-03-X	9 & 21
H400005-35-02-X	7 & 17
H400005-35-01-X	6 & 20
P/N	KEY SLOT

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : H400005-35-XX-X
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Tony	X.: ±0.35	X': ±5.0°	TITLE :
2X	Update code option	DENG	20230413	APPD.: Billy	X.X: ±0.25	X.X': ±3.0°	35 POS SEAL PLUG ASS
1X	ORIGINAL	Kenry			X.XX: ±0.15	X.XX': ±2.0°	DATE: 10-Oct-2015
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.15	X.XXX': ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4